


ISO codes for pulltest	
ECE R 14 / FMVSS210	
bucket seat	

point of application	N
sensor location	cylinder of pull machine
dimension	force
	displacement

	ISO code	main location
1	T?TDSB000000FOX?	traction device shoulder belt
1	T?TDSB000000DSX?	traction device shoulder belt
2	T?TDLB000000FOX?	traction device lap belt
2	T?TDLB000000DSX?	traction device lap belt
3	T?TDCG000000FOX?	traction device center of gravity
3	T?TDCG000000DSX?	traction device center of gravity

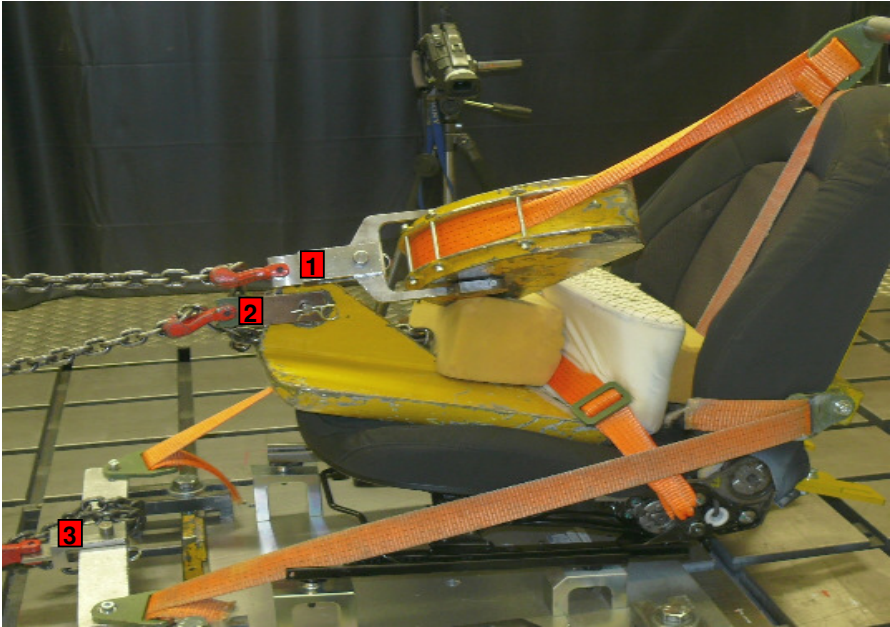

If the test setup is in a car body, use 1 instead of T for the test object.


ISO codes for pulltest

ECE R 14 / FMVSS210

two seat

point of application	N
sensor location	cylinder of pull machine
dimension	force
	displacement

	ISO code	main location
1	T ?TDSB000000FOX?	traction device shoulder belt
1	T ?TDSB000000DSX?	traction device shoulder belt
2	T ?TDLB000000FOX?	traction device lap belt
2	T ?TDLB000000DSX?	traction device lap belt
3	T ?TDCG000000FOX?	traction device center of gravity
3	T ?TDCG000000DSX?	traction device center of gravity
4	T ?BLOP000000DSX?	belt loop

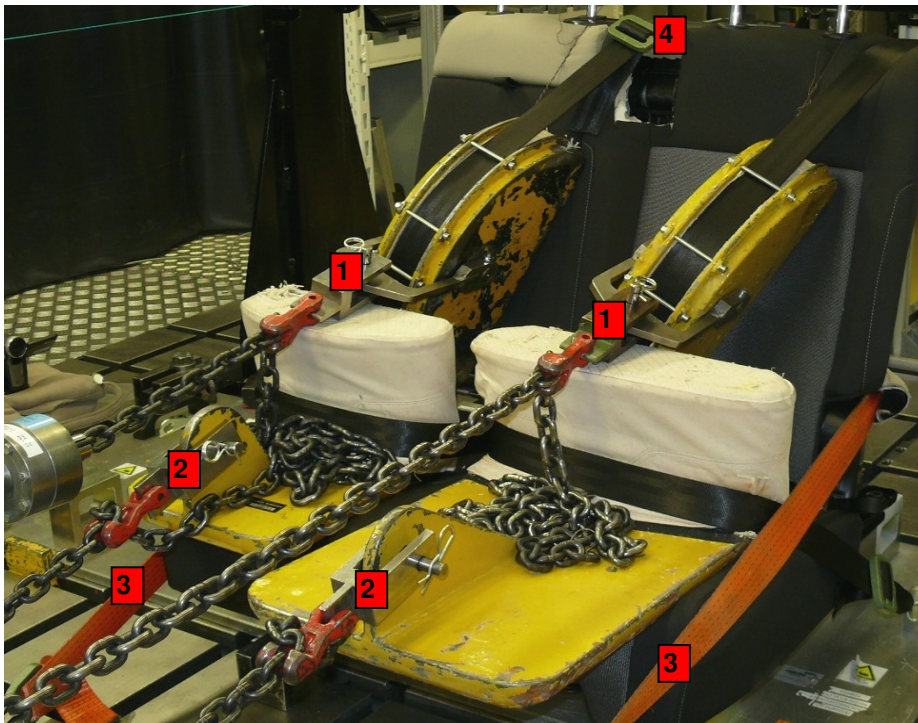

If the test setup is in a car body, use 1 instead of T for the test object.


ISO codes for pulltest

ECE R 14 / FMVSS210

position 4-6 or 7-9

point of application	N
sensor location	cylinder of pull machine
dimension	force
	displacement

	ISO code	main location
1	T ?TDSB000000FOX?	traction device shoulder belt
1	T ?TDSB000000DSX?	traction device shoulder belt
2	T ?TDLB000000FOX?	traction device lap belt
2	T ?TDLB000000DSX?	traction device lap belt
3	T ?TDCG000000FOX?	traction device center of gravity
3	T ?TDCG000000DSX?	traction device center of gravity

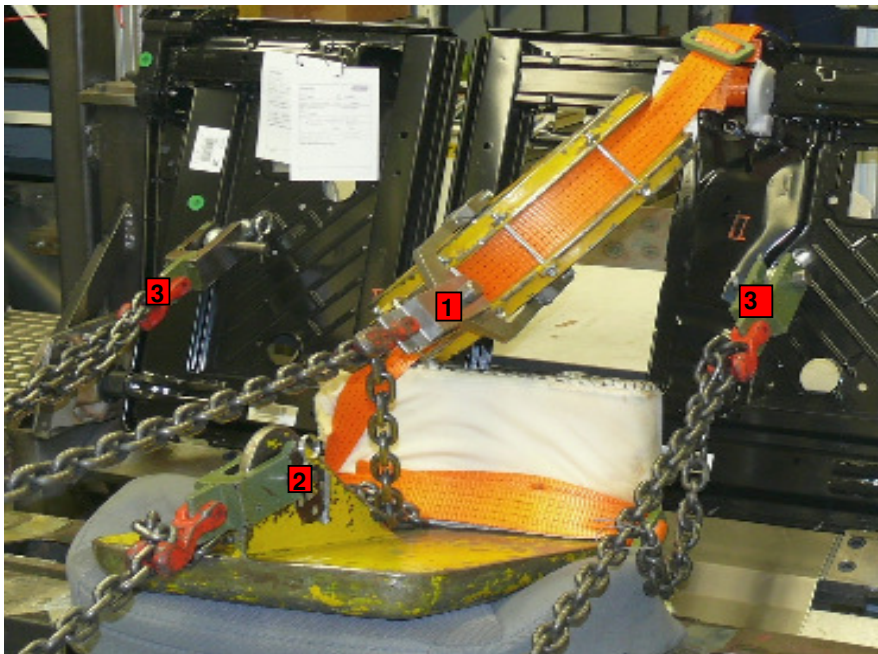

For the center of gravity of the 60% part always use the outer position number

If the test setup is in a car body, use 1 instead of T for the test object.

ISO codes for pulltest

ISOFIX ECE R14

	point of application	N
	sensor location	cylinder of pull machine
	dimension	force
		displacement

	ISO code	main location
1	T ?SFAD000000FOX?	Static Force Application Device
1	T ?SFAD000000DSX?	Static Force Application Device
1	T ?SFAD000000FOY?	Static Force Application Device
1	T ?SFAD000000DSY?	Static Force Application Device




If the test setup is in a car body, use 1 instead of T for the test object.

ISO codes for pulltest
top tether pull / ADR34

point of application	N
sensor location	cylinder of pull machine
dimension	force
	displacement

	ISO code	main location
1	T ?TOPT000000FOX?	top tether
1	T ?TOPT000000DSX?	top tether
2	T ?TDCG000000FOX?	traction device center of gravity
2	T ?TDCG000000DSX?	traction device center of gravity

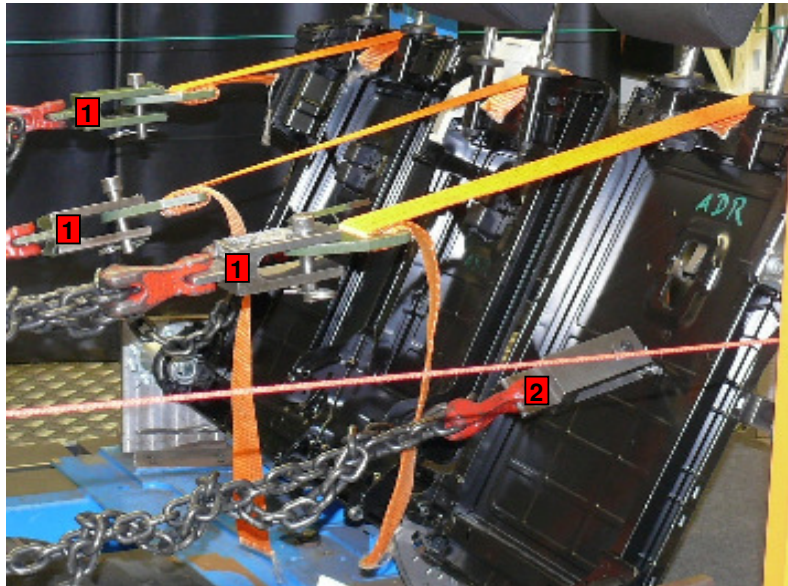


For the center of gravity of the 60% part always use the outer position number
If the test setup is in a car body, use 1 instead of T for the test object.

ISO codes for pull test	
ECE R17	

point of application	N
sensor location	
dimension	force
	angle
	moment (calculated)

	ISO code	main location
1	T?SEBALE0000ANY?	seat back
1	T?SEBARI0000ANY?	seat back
2	T?BAFO000000FOX?	back form
3	T?BAFO000000MOY?	back form
4	T?BAFO000000ANY?	back form

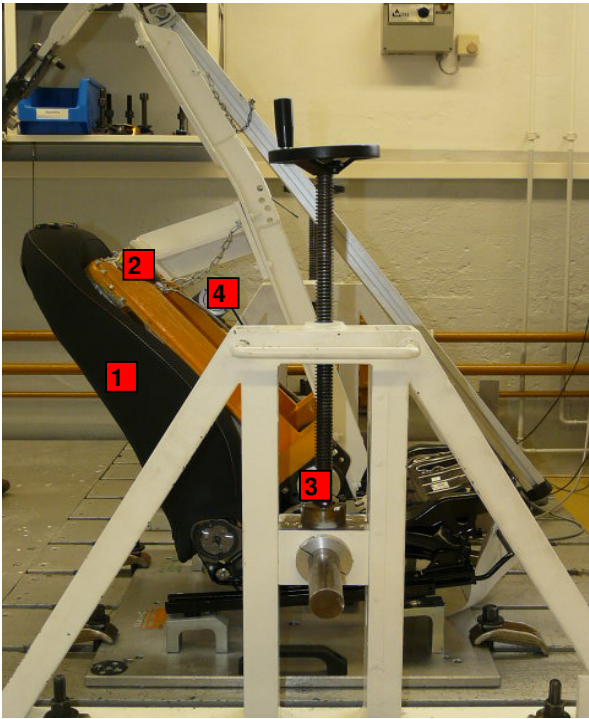

ISO codes for push test
head restraint ECE R17

point of application	N
sensor location	
dimension	force
	displacement
	moment (calculated)
	angle

	ISO code	main location
1	T?HEFO000000FOX?	head form
1	T?HEFO000000DSX?	head form
2	T?BAFO000000FOX?	back form
2	T?BAFO000000MOY?	back form
3	T?BAFO000000ANY?	back form

