

Frontal Impact




Note that sensor orientation is different for side impact configurations.
ISO Codes used must reflect the chosen orientation.

Left-hand side impact: CHST LE UP QA DS 0, CHST LE UP QA VO 0,
CHST LE LO QA DS 0 and CHST LE LO QA VO 0.

Right-hand side impact: CHST RI UP QA DS 0, CHST RI UP QA VO 0,
CHST RI LO QA DS 0 and CHST RI LO QA VO 0.

Note that the IR-TRACC device fitted to this dummy records a voltage.
It is more normal to exchange the displacement channel.

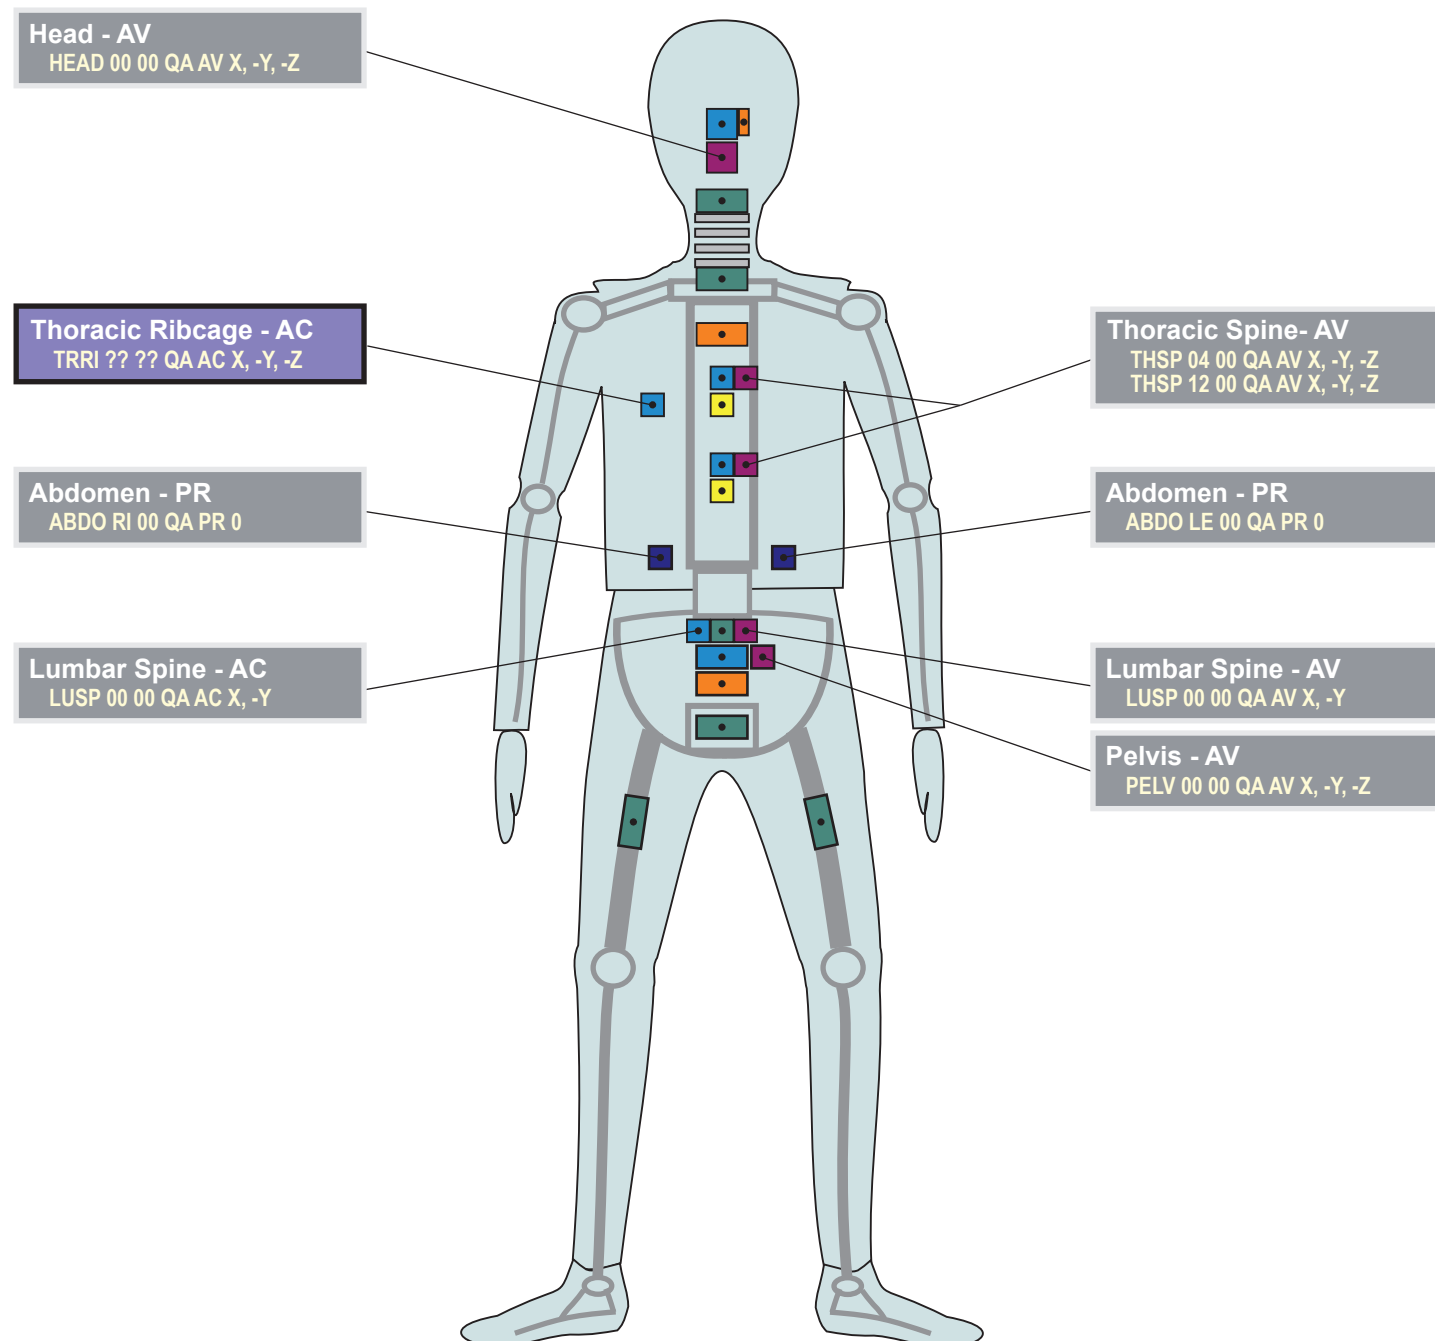

Note that sensor locations are not fixed: transducers are taped in position as required. ISO Codes used must reflect the chosen position. FL1 should reflect the side, LE or RI, for these channels, if used.

