


Frontal Impact

Note that sensor orientation is different for side impact configurations.
ISO Codes used must reflect the chosen orientation.

Left-hand side impact: CHST LE UP QA DC 0, CHST LE UP QA VO 0, CHST LE LO QA DC 0, CHST LE LO QA VO 0,
CHST LE UP QAAN Z and CHST LE LO QAAN Z.

Right-hand side impact: CHST RI UP QA DC 0, CHST RI UP QA VO 0, CHST RI LO QA DC 0, CHST RI LO QA VO 0,
CHST RI UP QAAN Z and CHST RI LO QAAN Z.

Note that the IR-TRACC device fitted to this dummy records a voltage.
It is more normal to exchange the distance channel, IR-TRACC total length.

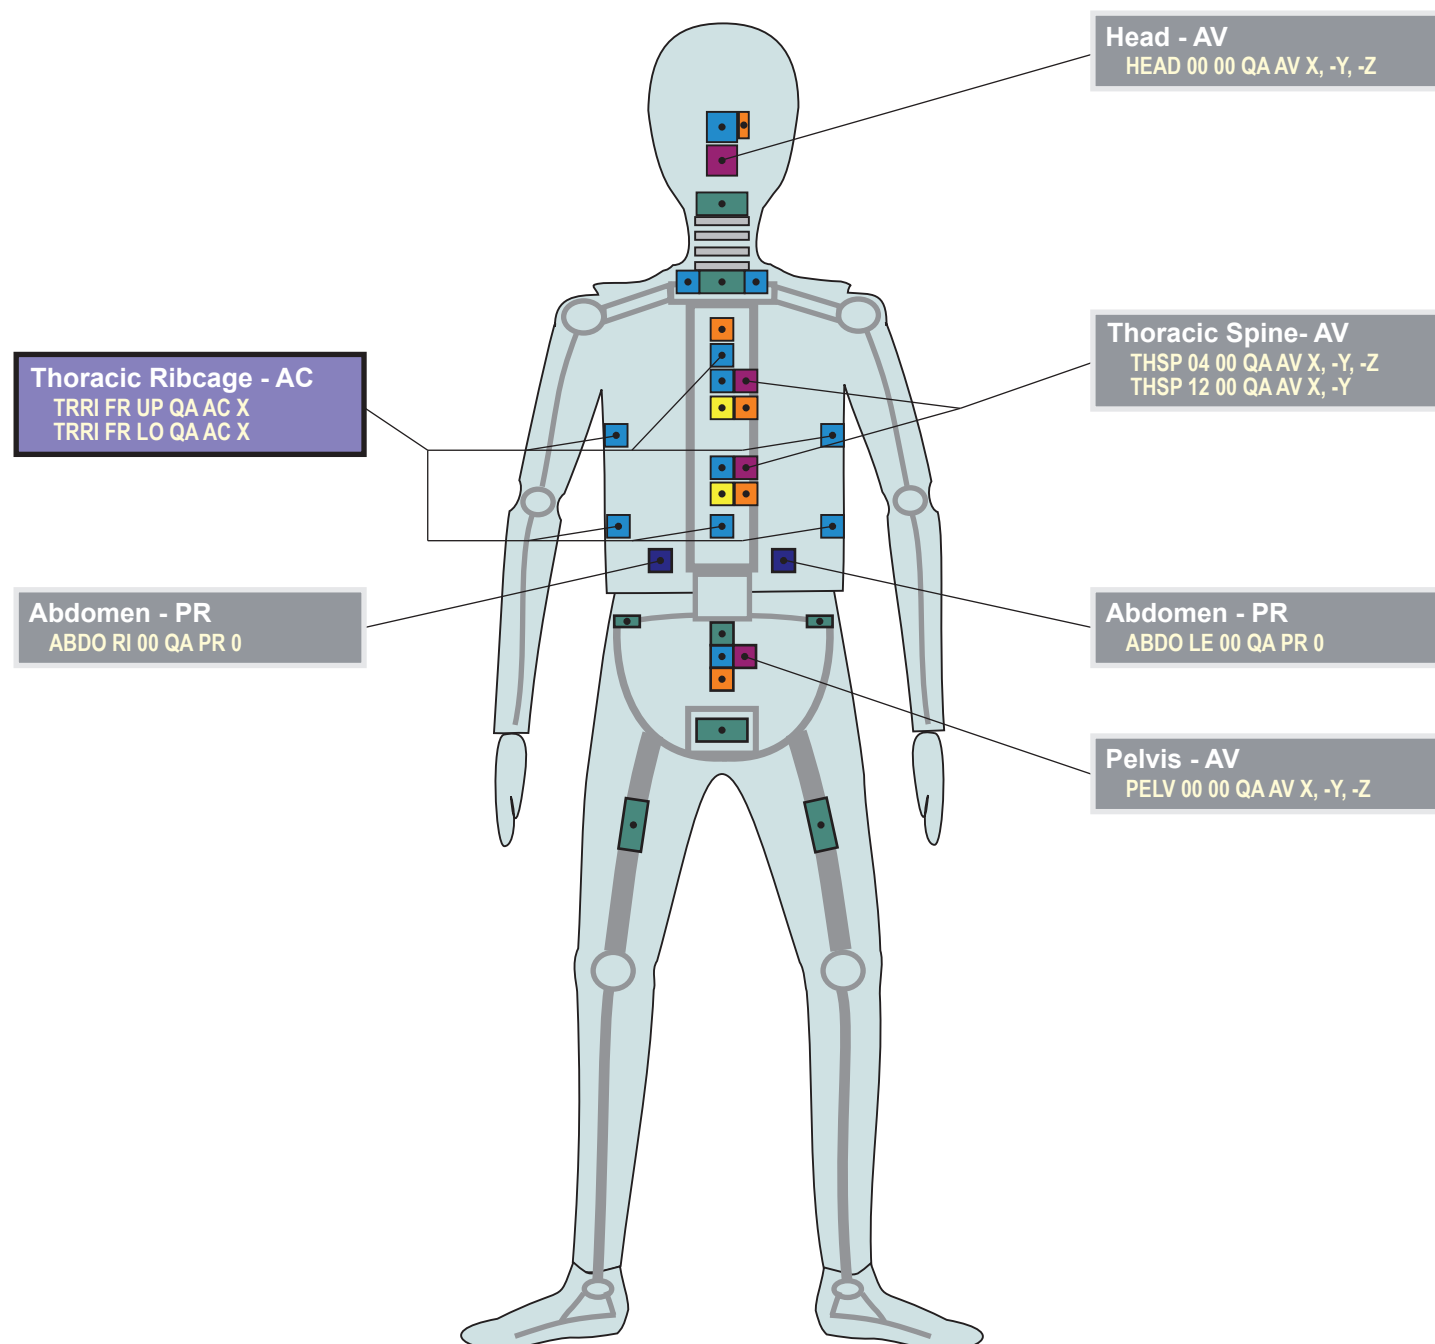

Frontal Impact



Note that sensor orientation is different for side impact configurations.

ISO Codes used must reflect the chosen orientation.

Left-hand side impact: TRRI LE UP QA AC Y and TRRI LE LO QA AC Y.

Right-hand side impact: TRRI RI UP QA AC Y and TRRI RI LO QA AC Y.

